

7UHQFK 026 %DUULHU 6FKRWVN\ 5H

DO-201AD

76\$ /



Cathode → Anode

Features

† \$ G Y D Q W F U H G Q F K W H F K Q R O R J \
† / R Z R U Z D R G W D J H G U R S
† / R Z R Z I O R V V H V
† + L J H K I L F L H Q F \ R S H U D W L R Q
† / H D G H) H Q L V K & R P S O L D Q W

Applications

‡ ' & ' & & R Q Y H U W H U V
‡ \$ & ' & \$ G D S W R U V
‡ 6 Z L W F K R D H S S O L H V
‡) U H H Z K H ' H L Q I G Q J V

Maximum ratings and electrical characteristics ($T_J = 25^\circ C$ unless otherwise noted)



3 D U D P H W H U	6 \ P E R O	/ L P L W	8 Q L W
0 D [L P X P H S H V S I H M U N Y Y H Y U R / O H W D J H	9 55 0		9
0 D [L P X D P Y H U D R I W Z D U G U F X E U W H I Q W G	,) \$ 9		\$
3 H D N I R W Z D I B Q U U H Q W V L Q D D H I Q Z D Y H V X S H U L P B R U D H Q R C S Q G L R G H	,) 6 0		\$
2 S H U D M X Q B D M Q R Q W R U D J H W H P S H U D W X D H D Q J H W R			f &
7 \ S L F M D K H U P D O U S H H V U V O W H Q F H	5 § - &		f & :
, Q V W D Q W D Q H R R \ O W R D U S H G L R G H		7 < 3	0 \$;
	,) \$	7 - f &	
	,) \$	7 - f &	
	,) \$	7 - f &	
, Q V W D Q W D Q H R X M U S H H M R D H M U D W U H H Q Y H Y U R / O H W D J H	7 - f &		X \$
	7 - f &		P \$

1 R W H V

3 X O V H W H V W X O V H Z L G W K G X W \ F \ F O H


3 X O V H W H V W 3 X O P W H Z L G W K 0

RATINGS AND CHARACTERISTICS CURVES 7\$ f & X Q O H V V Q R W K B U Z L V H

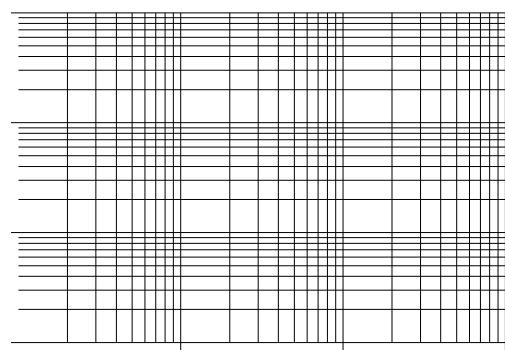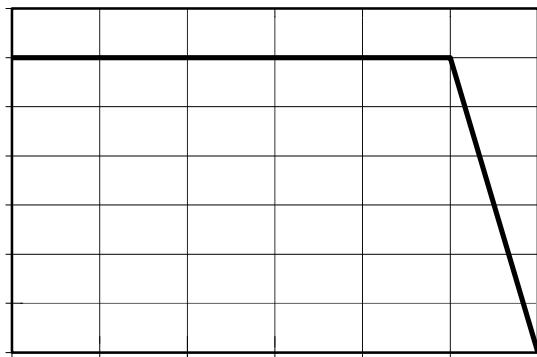

PACKAGE OUTLINE DIMENSIONS

DO-201AD

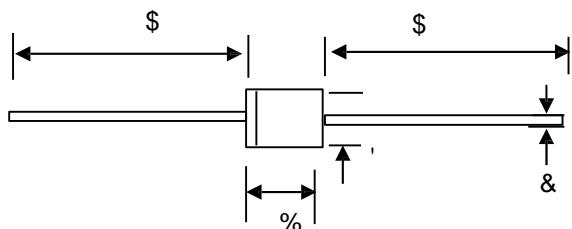


'2 \$' P H F K D Q G I F W D

81,7		\$	%	C	'
PP	P D [1.4	
	P L Q			1.1	
PLO	P D [5 .1		
	P L Q				

ODUNLQJ , QIRUPDWLRQ

& DWKRGH

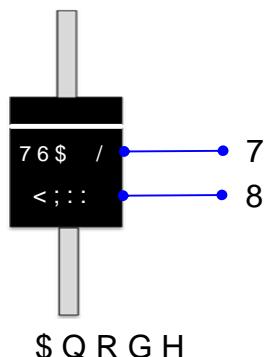

73URGXFW PROSHO

83' & LQIRUPDWLRQ


9< ; ::

:: :HHN FRGH WR
; , QWHLUGQHDOVLFIRFGDHWLRQ
< HDU FRGH H[

3DFNDJLQJ , QIRUPDWLRQ

, QVLGH %R[

2XWVLGH %R[

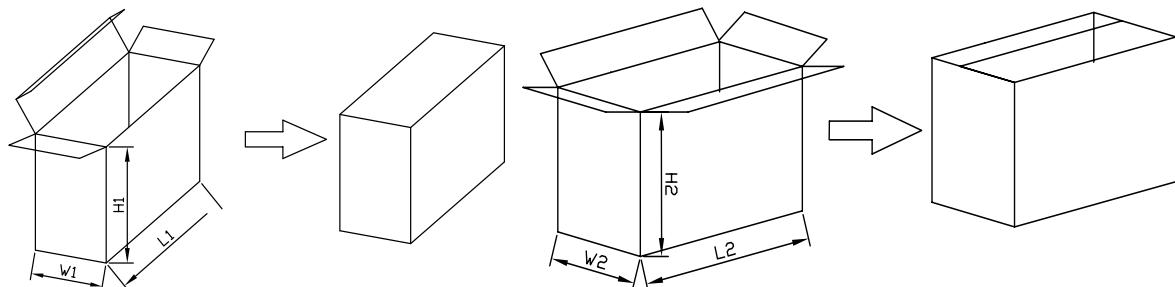

3DFNDJLQJ , QIRUPDWLRQ

12	81,7	, QVLGH			2XWVLGH %R[
6L]H	PP	/	:	+	/	:	+
				4			
47<	3&6	6PDOSBFDJH3&6 FDUWRQ			3&6 FDUDWRQHLVWRWDOD		
1RW	7ROHUDQFHPP	PP" PP			PP" PP		