

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD  
 TSA 9



Cathode Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDURGDWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡ )UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LPHSHVSHUNYHYURQWDJH		9550		9
0D[LPHYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRUZDURUUHQW VLQRDHLQZDYH VXSHULPSURDCHRSRGLRGH		,) 60		\$
2SHUDMXQRDQLRQWRUDJH WHPSHUDW		X0H767°C	JH WR	f &
7\SLRDKHUPDO USHVULVQHDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRROWRDURZDUG SHGLRGH	,) \$	7- f&	7 < 3	0\$;
	,) \$	7- f&		
	,) \$	7- f&		
	,) \$	7- f&		
,QVWDQWDQHRXUUSHQWRDURZDUG UDWHYHYURQWDJH	7- f&	,5		X\$
	7- f&			P\$


1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH


3XOVH WHVW 3XOPH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES 7\$

QVVRWUZVHRWG

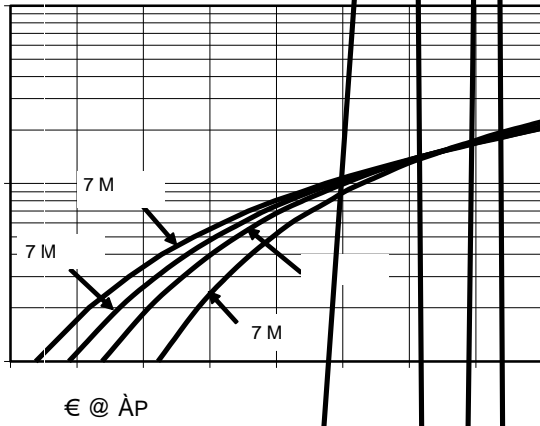

7 6 \$ 9

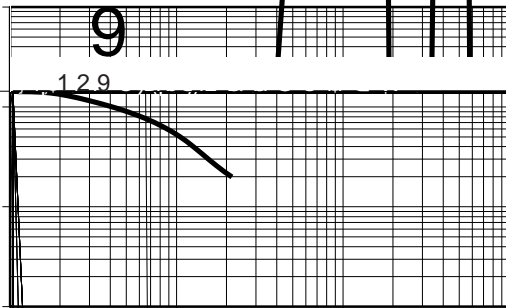


76\$ 9 5HY

:RUOG ,QWH&JKLDCMDFRLQDHDG

## PACKAGE OUTLINE DIMENSIONS

### DO-201AD

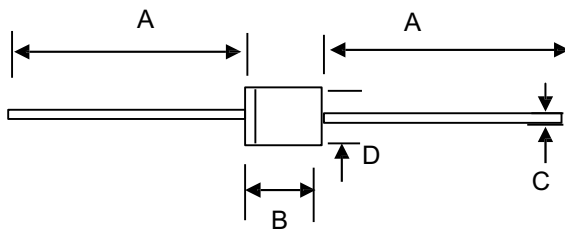


### DO-201AD mechanical data

UNIT		A	B		D
mm	max	26.5	9.5	4	5.3
	min	24.5	7.3	1	4.8
mil	max	1043.30	374.01		208.67
	min	946.57	287.40		188.97

0DUNLQJ ,QIRUPDWLRQ

Cathode



\$QRGH

73URGXFW PQRGH

83' & LQIRUPDWLRQ

